

# GENERATING SET GE 165 FSX

The images are for reference



## FEATURES

- Bundled base suitable to contain any liquids leakage from engine avoiding environmental pollution
- Oil drain pump
- Fuel pre-filter with water separator
- Large doors for better and easy maintenance (air, oil, fuel filters replacement)
- 2 central lifting eyes
- Control panel with digital control unit available with automatic or manual version
- Suitable for a wide range of uses in general construction
- Supersilenced
- Meets EC directives for noise and safety



POWER RATINGS	
* Stand-By three-phase power (LTP)	168 kVA (134.4 kW) / 400V / 242.5 A
* PRP three-phase power	153 kVA (122.4 kW) / 400V / 221 A
* PRP single-phase power	122 kVA (97.6 kW) / 400V / 176.3 A
Frequency	50 Hz
Cos φ	0.8

\* Output powers according to ISO 8528-1

## DEFINITION

Valid declared powers up to the followings environmental conditions: temperature 25°C, altitude 100 meters above sea level)

**LTP power: stand-by power:** Maximum available power for use with variable loads for a yearly number of hours limited at 500 h. No overload is admitted.

**PRP power:** continue power with variable loads. Maximum power for use with variable loads for a yearly illimited nubers of hours.

**COP power:** continuous power with constant load. Maximum power for use with constant loads for a yearly unlimited numbers of hours.

## ENGINE 1500 RPM

4 STROKE, DIRECT INJECTION, TURBOCHARGED	
Model	FPT (IVECO) N67 TE1F (Stage 3A)
* Stand-By net power	145 kW (197.2 hp)
* PRP net power	131.5 kW (178.8 hp)
* COP net power	105 kW (143 hp)
Cylinders / Displacement	6/ 6700 cm <sup>3</sup> (6.7 lit.)
Bore / Stroke	104 / 132 (mm)
Compression ratio	17.5 : 1
BMEP (Brake Mean Effective Pressure : LTP - PRP)	1791 kPa - 1629 kPa
Speed governor type	Electronic
<b>FUEL CONSUMPTION</b>	
110 % (Stand-by power)	205 g/kWh - 36.5 lit./h
100 % to PRP	210 g/kWh - 34 lit./h
75 % to PRP	216 g/kWh - 26.5 lit./h
50 % to PRP	235 g/kWh - 20 lit./h
<b>COOLING SYSTEM</b>	
Total system cap. - only engine	25.5 lit. - 10.5 lit.
Fan air flow	228 m <sup>3</sup> /min.
<b>LUBRIFICATION SYSTEM</b>	
Total oil system capacity	17 lit.
Oil capacity in sump	8 lit. (min) - 12 lit. (max)
Oil consumption at full load	< 0.05 lit./h

\* Output powers according to ISO 3046-1

<b>EXHAUST SYSTEM</b>	
Maximum exhaust gas flow	13 kg/mim.
Max. exhaust gas temp.	600 °C
Maximum back pressure	5 kPa (0.05 bar)
External diameter exhaust pipe	/
<b>ELECTRICAL SYSTEM</b>	
Starter motor power	3 kW
Battery charging alternator cap.	90 A
Cold start	- 10 °C
With cold start aid	- 25°C
<b>AIR FILTER</b>	
Combustion air flow	10.5 m <sup>3</sup> /min
<b>HEAT REJECTED AT FULL LOAD</b>	
To exhaust system	614 kcal/kWh
To water and oil	350 kcal/kWh
Radiated to room	160 kcal/kWh
To charge cooler	125 kcal/kWh



## ALTERNATOR

### SYNCHRONOUS, THREE-PHASE, SELF-EXCITED, SELF-REGULATED, BRUSHLESS

Continuous power	165 kVA
Stand-by power	180 kVA
Three phase voltage	380 - 415 Vac
Frequency	50 Hz
Cos φ	0.8
Model A.V.R.	MARK I
Voltage regulation acc.	± 0,5 %
Sustained short circuit current	3 I <sub>n</sub>
Transient dip (100% load)	< 20 %
Recovery time	< 0.3 sec
Efficiency at 100% load	92.9 % (400V - Cos φ 0.8)
Insulation	Class H
Connection - Terminals	Star - N°12
Electromagnetic compatibility ( R.F.I. suppr.)	EN 55011
Waveform distorsion - THD	< 2 %
Telephone interference - THF	< 2 %

### REACTANCES (165 kVA - 400V)

Direct axis synchronuos - X <sub>d</sub>	280 %
Direct axis transient - X' <sub>d</sub>	24 %
Subdirect axis transient - X'' <sub>d</sub>	13.5 %
Quadrature axis synchronuos - X <sub>q</sub>	135 %
Quadr. axis subtransient - X'' <sub>q</sub>	14.9 %
Negative sequence - X <sub>2</sub>	14.2 %
Zero sequence - X <sub>0</sub>	2.9 %
<b>TIME CONSTANTS</b>	
Transient - T' <sub>d</sub>	0.09 sec
Subtransient - T'' <sub>d</sub>	0.011 sec
Open circuit - T' <sub>do</sub>	0.95 sec
Armature - T <sub>a</sub>	0.012 sec
Short-circuit ratio K <sub>cc</sub>	0.47
Grado di Protezione IP	IP 23
Cooling air flow	0.42 m <sup>3</sup> /sec.
Coupling I Bearing	Direct SAE 3 - 11 ½ - N°1

## GENERAL SPECIFICATIONS

Fuel tank capacity	425 lt.
Running time (75% to PRP)	16 h
Starter battery	12 Vdc -180Ah
IP protection degree	IP 44

* Measured acoustic power L <sub>WA</sub> (pressure L <sub>pA</sub> )	93 dB(A) (68 dB(A) @ 7m)
* Guaranteed acoustic power L <sub>WA</sub> (pressure L <sub>pA</sub> )	94 dB(A) (69 dB(A) @ 7m)
Performance class (ISO 8528)	G3

\* Acoustic power according to European Directive 2000/14/CE

## CONTROL PANEL

- Controller AMF 25
- Controller supply switch
- Siren
- Emergency stop button
- TCM 35 remote control plug
- Four pole circuit breaker
- PAC (ATS) plug - Automatic control panel only
- Battery charger - Automatic control panel only
- Earth terminal (PE)

### EP6 CONTROLLER CHARACTERISTICS

Operating mode	<ul style="list-style-type: none"> <li>• OFF - MAN. - AUTO - TEST</li> </ul>
Display	<ul style="list-style-type: none"> <li>• Graphic back-light LCD display 128x64 pixels</li> </ul>
LEDs	<ul style="list-style-type: none"> <li>• Gen-set voltage OK</li> <li>• Gen-set failure</li> <li>• GCB ON (only for Automatic transfer unit)</li> <li>• Mains voltage OK (only for Automatic transfer unit)</li> <li>• Mains failure (only for Automatic transfer unit)</li> <li>• MCB ON (only for Automatic transfer unit)</li> </ul>
Buttons	<ul style="list-style-type: none"> <li>• START button</li> <li>• STOP button</li> <li>• FAULT RESET button</li> <li>• RESET HORN button</li> <li>• MODE selection button</li> <li>• Pulsante chiusura/apertura GCB button</li> <li>• Pulsante chiusura/apertura MCB button</li> <li>• N° 4 buttons for controller programming</li> </ul>
Generator Measures	<ul style="list-style-type: none"> <li>• Voltage : L1-L2 / L2-L3 / L3-L1 - N-L1/N-L2/N-L3</li> <li>• Current : I1 - I2 - I3</li> <li>• Powers : kVA - kW - kVAR (totali e per fase)</li> <li>• Energy : kVAh - kWh - kVARh</li> <li>• Cos φ (medium and per phase)</li> <li>• Frequency</li> </ul>
Engine Measures	<ul style="list-style-type: none"> <li>• Water temperature</li> <li>• Oil pressure</li> <li>• Fuel level</li> <li>• Rpm meter</li> <li>• Battery voltage</li> <li>• Maintenance</li> <li>• Hours meter</li> <li>• Starts number</li> </ul>
Generator Protections	<ul style="list-style-type: none"> <li>• Overload</li> <li>• Overcurrent</li> <li>• Short circuit</li> <li>• Over-Undervoltage</li> <li>• Over-Underfrequency</li> <li>• Voltage asymmetry</li> <li>• Unbalanced current</li> <li>• Phase sequence</li> </ul>
Engine Protections	<ul style="list-style-type: none"> <li>• Overspeed</li> <li>• High water temperature warning</li> <li>• Low oil pressure warning</li> <li>• Low fuel level warning</li> <li>• Over-Under battery voltage</li> <li>• Battery charge alternator failure</li> <li>• Start failure</li> <li>• Stop failure</li> <li>• Emergency stop</li> <li>• Low water level shutdown (option)</li> </ul>

### AMF functions (Automatic control panel only)

- Measure mains voltage : L1-L2 / L2-L3 / L3-L1 - N-L1/N-L2/N-L3
- Measure mains frequency
- Three phase detection
- Over-Under mains voltage
- Over-Under mains frequency
- Voltage asymmetry
- Phase sequence
- Dual mutual stand-by application

### Features

- Event log and alarms
- 2 tests run scheduler (Automatic test or scheduled starts)
- Engine idle management (Idle)
- Remote Start and Stop
- Pre-heating
- 2 selectable languages (other languages available)
- Setpoints adjustable via controller buttons or PC
- Direct connection to engines with ECU via Can bus J1939
- Configurable inputs and outputs (only via PC)
- IP65 protection
- Operation temperature: -20°C / +70°C

### Communication

- RTU Modbus (optional board with RS232 & RS485 outputs is needed)
- TCP/IP Modbus (optional Ethernet board with RJ45 output is needed)
- SNMP Modbus (optional Ethernet board with RJ45 output is needed)
- Internet (optional Ethernet board optional is needed)
- GSM/GPRS (integrated Modem board optional is needed) for Gen-set remote control via SMS or internet

### CONTROL PANEL VERSION WITH OUTPUT SOCKETS

#### SOCKETS

Each socket is protected by own automatic switch.  
Circuit breaker for 125A and 63A sockets.  
GFI and circuit breaker 30mA for 32A and 16A socket.

- 1x 400V 125A 3P+T CEE
- 1x 400V 63A 3P+T CEE
- 1x 400V 32A 3P+T CEE
- 1x 400V 16A 3P+T CEE
- 1x 230V 16A 2P+T CEE
- 1x 230V 16A 2P+T SCHUKO

# WEIGHT - DIMENSIONS AND ACCESSORIES

GE 165 FSX





**DRY WEIGHT MACHINE:**  
• 2700 kg

Generating set pictured may include optional accessories.



**DIMENSIONS DRAW**

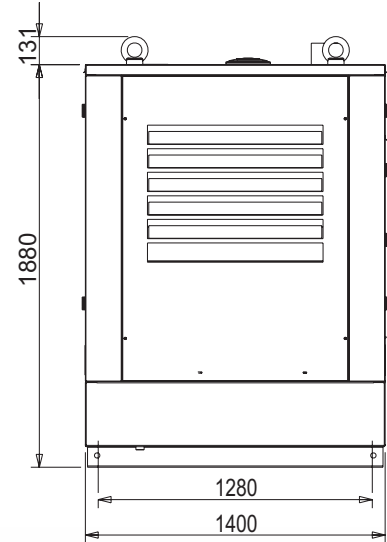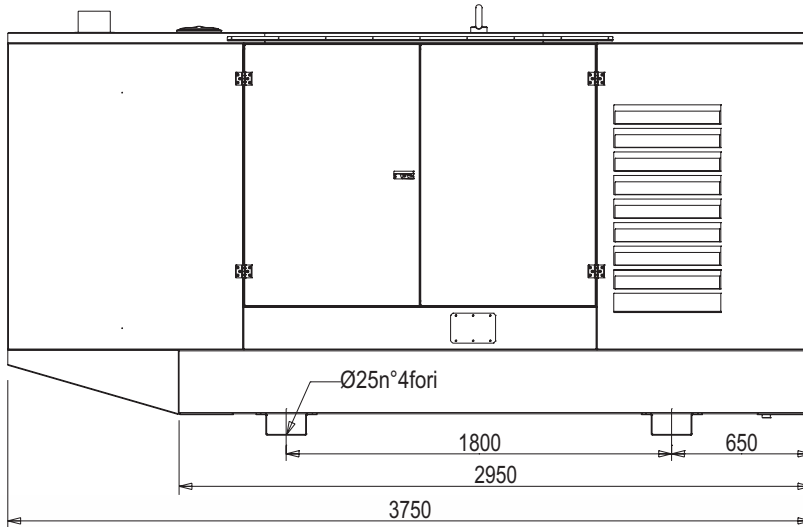

### OPTIONS ON REQUEST

- Automatic transfer switch unit (ATS) PAC 170-M (250A)
- Remote control TCM35
- Earthing kit
- Container feet kit

### VERSIONS ON REQUEST

- Version with manual control panel 6 output sockets EC and SCHUKO (see Control board with output sockets section)
- Manual digital control panel (without sockets)
- Parallel switch board

### FACTORY INSTALLATION OPTIONS

- Engine water heater WH
- Low level water sensor
- 3-way valve fuel system with quick connection for external fuel tank supply
- Main battery switch
- Automatic fuel transfer pump
- PMG - permanent magnet alternator excitation
- Electronic leakage relay
- Isometer
- Volt adjustable from control panel
- Deadening kit
- Plug-in board with RS232 & RS485 output for RTU Modbus protocol
- Ethernet plug-in board with RJ45 output for TCP/IP Modbus protocol - SNMP Modbus - Internet
- Plug-in board with integrated GSM/GPRS Modem for Gen-set remote control via SMS or Internet

## GENERAL INFORMATION

### COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

- 2006/42 / EC (Machines Directive)
- 2014/35 / EU (Low Voltage Directive)
- 2014/30 / EU (EMC Directive)
- 2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)
- ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2008 - Cert. 0192

### WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

© MOSA - Viale Europa, 59 - 20090 Cusago (Milano) - Italy - phone +39-0290352.1 - fax + 39-0290390466 E-mail: info@mosa.it Web site: www.mosa.it

