



GENERATING SET GE 45 YSX

The images are for reference



FEATURES

- Version also available with Stage 3A engine
- Automatic voltage regulation AVR with three-phase sensing
- The rounded edges of the canopy designed for rainwater drainage away
- Bunded base suitable to contain any liquids leakage from engine avoiding environmental pollution
- External caps for oil and water drain
- Large doors for better and easy maintenance (air, oil, fuel filters replacement)
- Central lifting eye
- Forklift pockets
- Ready for connection to automatic transfer unit EAS (AMF+ATS)
- Complies with regulation 2016/1628/EU FOR STATIONARY USE ONLY



water cooled



diesel



three-phase power



electric



super silenced

POWER RATINGS	
* Stand-By three-phase power	46 kVA (36.8 kW) / 400V / 66.4 A
* PRP three-phase power	42 kVA (33.6 kW) / 400V / 60.6 A
* COP three-phase power	/
Frequency	50 Hz
CoS φ	0.8

* Output powers according to ISO 8528-1

DEFINITION

Valid declared powers up to the followings environmental conditions: temperature 25°C, altitude 100 meters above sea level

LTP power: stand-by power: Maximum available power for use with variable loads for a yearly number of hours limited at 500 h. No overload is admitted.

PRP power: continue power with variable loads. Maximum power for use with variable loads for a yearly illimited nubers of hours.

COP power: continuous power with constant load. Maximum power for use with constant loads for a yearly unlimited numbers of hours.

ENGINE 1500 RPM

4 STROKE, DIRECT INJECTION, TURBOCHARGED		
Model	YANMAR 4TNV98T-Z Stage 3A	YANMAR 4TNV98T
* Stand-By net power	41.9 kW (57 hp)	
* PRP net power	37.9 kW (51.5 hp)	
* COP net power	/	
Cylinders / Displacement	4 / 3.3. lit.	
Bore / Stroke	98 / 110 (mm)	
Compression ratio	18.5 : 1	
BMEP (Brake Mean Effective Pressure : LTP - PRP)	/	
Speed governor type	Electronic	Mechanical
FUEL CONSUMPTION		
110 % (Stand-by power)	11 lit./h	
100 % to PRP	9.8 lit./h	
75 % to PRP	7.4 lit./h	
50 % to PRP	5.1 lit./h	
COOLING SYSTEM		
Total system cap. - only engine	9 lit. - 4.2 lit.	
Fan air flow	70 m³/min	
LUBRICATION SYSTEM		
Total oil system capacity	/	
Oil capacity in sump	4.5 lit. (min) - 11.2 lit. (max)	
Oil consumption at full load	/	

* Output powers according to ISO 3046-1

EXHAUST SYSTEM	
Maximum exhaust gas flow	/
Max. exhaust gas temp.	620 °C
Maximum back pressure	9.8 kPa (0.1 bar)
External diameter exhaust pipe	/
ELECTRICAL SYSTEM	
Starter motor power	2.3 kW
Battery charging alternator cap.	40 A
Cold start	- 15 °C
With cold start aid	/
AIR FILTER	
Combustion air flow	3.2 m³/min
HEAT REJECTED AT FULL LOAD	
To exhaust system	/
To water and oil	/
Radiated to room	/
To charge cooler	/

ALTERNATOR

SYNCHRONOUS, THREE-PHASE, SELF-EXCITED, SELF-REGULATED, BRUSHLESS	
Continuous power	47 kVA
Stand-by power	42 kVA
Three phase voltage	380-415 Vac
Frequency	50 Hz
Cos φ	0.8
Model A.V.R.	HVR-30 (3ph. sensing)
Voltage regulation acc.	± 1.0 %
Sustained short circuit current	3 I _n
Transient dip (100% load)	10 %
Recovery time	≤ 3 sec.
Efficiency at 100% load	89.3 % (400V - Cos φ 0.8)
Insulation	Classe H
Connection - Terminals	Stella - N°12
Electromagnetic compatibility (R.F.I. suppr.)	EN 55011
Waveform distorsion - THD	< 3 %
Telephone interference - THF	< 2 %

REACTANCES (20 kVA - 400V)	
Direct axis synchronous - X _d	253 %
Direct axis transient - X' _d	20 %
Subdirect axis transient - X'' _d	8 %
Quadrature axis synchronous - X _q	141 %
Quadr. axis subtransient - X'' _q	/
Negative sequence - X ₂	/
Zero sequence - X ₀	/
TIME CONSTANTS	
Transient - T' _d	0.014 sec
Subtransient - T'' _d	0.008 sec
Open circuit - T' _{do}	0.180 sec
Armature - T _a	/
Short-circuit ratio K _{cc}	0.60
Cooling air flow	0.13 m ³ /sec.
Coupling Bearing	Diretto SAE 3 -11.5 ½ - N°1

GENERAL SPECIFICATIONS

Fuel tank capacity	100 lt.
Running time (75% to PRP)	13.5 h
Starter battery	12 Vdc -100Ah
IP protection degree	IP 44

* Measured acoustic power L _{WA} (pressure L _{pA})	90 dB(A) (65 dB(A) @ 7m)	
* Guaranteed acoustic power L _{WA} (pressure L _{pA})	91 dB(A) (66 dB(A) @ 7m)	
Performance class (ISO 8528)	G3	G2

* Acoustic power according to European Directive 2000/14/CE

CONTROL PANEL

- Controller EP6
- Fuel level gauge
- Siren
- Emergency stop button
- Local-Remote Start switch
- EAS plug
- TCM 35 remote control plug
- Voltmeter switch 0 - RS - ST - TR
- Four pole circuit breaker
- ELCB-GFI (Ground Fault Interruptor) 30 mA
- Terminal output with bus bar
- Output sockets: 1x 230V 16A 2P+T SCHUKO
- Circuit breakers and ELCB-GFI for 230V 16A 30 mA sockets
- Earth terminal (PE)

CONTROL PANEL VERSION WITH OUTPUT SOCKETS	
SOCKETS	1x 400V 63A 3P+N+T CEE
Every 16A and 32A socket is protected by its own circuit breaker and GFI 30mA	1x 400V 32A 3P+N+T CEE 1x 400V 16A 3P+N+T CEE 2x 230V 16A 2P+T CEE o SCHUKO

EP6 CONTROLLER CHARACTERISTICS	
Operating mode	OFF - MAN. - AUTO
Display	4-digits display
LEDs	Engine is running AUTO mode
Buttons/controls	Starter key AUTO button N° 5 buttons for controller programming
Measures	Generator voltage Generator current Frequency Engine speed Battery voltage Charger battery voltage Hoursmeter
Alarms	Low oil pressure High temperature Belt break Low level fuel Emergency stop button Starting failure Over-under generator voltage Over-under frequency Over-under speed High-low battery voltage Overload generator Internal memory failure
Functions	Remote starting (only to AUTO) Cold start aid Automatic periodic test (only to AUTO) Generator contactor control

WEIGHT - DIMENSIONS AND ACCESSORIES

GE 45 YSX



DRY WEIGHT MACHINE:



- 1020 Kg (tank version 100 lt)
- 1210 Kg (tank version 350 lt)

Generating set pictured may include optional accessories.



DIMENSIONS DRAW

- 2050 x 900 x 1730 mm (tank version 350 lt)
- For version with **100 lt tank**, see the illustrations as shown below.

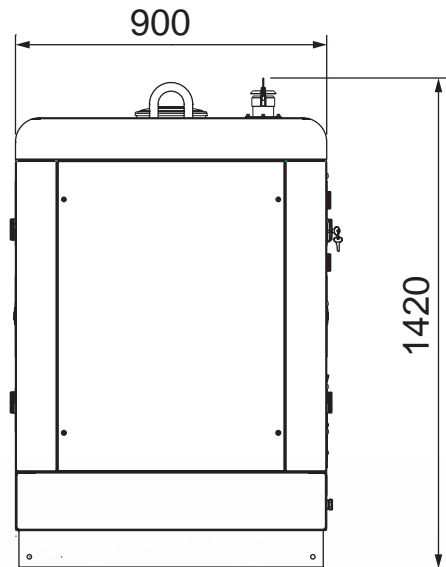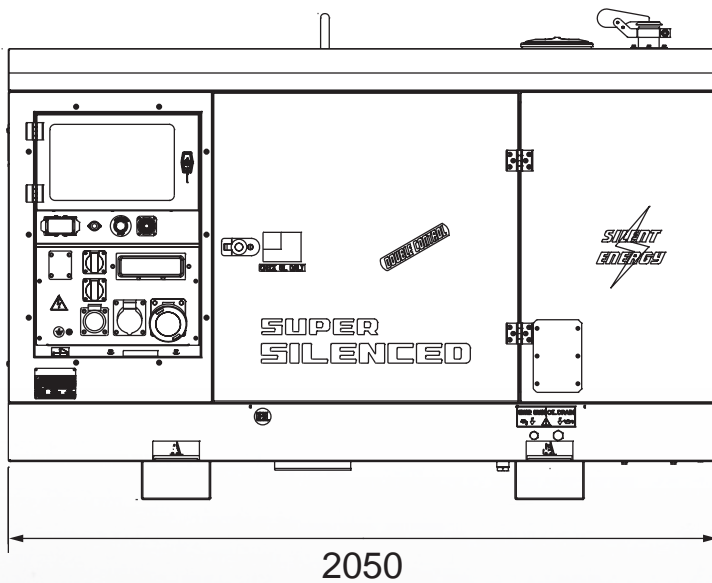

⊕ OPTIONS ON REQUEST

- Automatic transfer unit EAS 42 - 809 (60 A)
- Remote control TCM35
- Site tow CTL20
- Earthing kit
- Galvanized skid base frame
- Road trailer CTV1/O
- Road trailer CTV1/S

⊗ VERSIONS ON REQUEST

- Version with electrical panel with 5 EC Sockets:
 - 1x400V 63A 3P+N+T CEE
 - 1x400V 32A 3P+N+T CEE
 - 1x400V 16A 3P+N+T CEE
 - 2x230V 16A 2P+T CEE
- Version with electrical panel with 5 EC Sockets and SCHUKO:
 - 1x400V 63A 3P+N+T CEE
 - 1x400V 32A 3P+N+T CEE
 - 1x400V 16A 3P+N+T CEE
 - 2x230V 16A 2P+T SCHUKO

⊗ FACTORY INSTALLATION OPTIONS

- Engine heater
- Gauges - water temperature and oil pressure
- Spark arrestor
- 3-way valve fuel system with quick connection for external fuel tank supply
- 350 litre internal tank
- Main battery switch
- Electronic leakage relay
- Isometer
- Radio control

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

- 2006/42 / EC (Machines Directive)
- 2014/35 / EU (Low Voltage Directive)
- 2014/30 / EU (EMC Directive)
- ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2008 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

Non-contractual document. Specification subject to change without notice.

© MOSA - Viale Europa, 59 - 20047 Cusago (Milano) - Italy - phone +39-0290352.1 - fax + 39-0290390466 E-mail: export@mosa.it Web site: www.mosa.it

