




GENERATING SET GE 110 FSX



FEATURES

- Available version with STAGE 3A engine
- Bundled base suitable to contain any liquids leakage from engine avoiding environmental pollution
- Oil drain pump
- Fuel pre-filter with water separator
- Large doors for better and easy maintenance (air, oil, fuel filters replacement)
- Single point lifting eye and forklift pockets
- Control panel with digital control unit available with automatic or manual version
- Suitable for a wide range of uses in general construction
- Supersilenced
- Meets EC directives for noise and safety



water cooled



diesel



three-phase power



electric

POWER RATINGS

* Stand-By three-phase power (LTP)	110 kVA (88 kW) / 400V / 159A
* PRP three-phase power	100 kVA (80 kW) / 400V / 144A
* PRP single-phase power	81.5 kVA (65.2 kW) / 400V / 117.6A
Frequency	50 Hz
Cos φ	0.8

* Output powers according to ISO 8528-1

DEFINITION

Valid declared powers up to the followings environmental conditions: temperature 25°C, altitude 100 meters above sea level)

LTP power: stand-by power: Maximum available power for use with variable loads for a yearly number of hours limited at 500 h. No overload is admitted.

PRP power: continue power with variable loads. Maximum power for use with variable loads for a yearly illimited nubers of hours.

COP power: continuous power with constant load. Maximum power for use with constant loads for a yearly unlimited numbers of hours.

ENGINE 1500 RPM

4 STROKE, DIRECT INJECTION, TURBOCHARGED

Model	FPT (IVECO) N45TM2A	FPT (IVECO) N45TE2F Stage 3A
* Stand-By net power	96.2 kW (131 hp)	98 kW (133 hp)
* PRP net power	87.5 kW (119 hp)	89 kW (121 hp)
* COP net power	70 kW (95 hp)	71 kW (97 hp)
Cylinders / Displacement	4 / 4500 cm ³ (4.5 lt.)	
Bore / Stroke	104 / 132 (mm)	
Compression ratio	17.5 : 1	
BMEP (Brake Mean Effective Pressure : LTP - PRP)	1742 kPa - 1584 kPa	1777 kPa - 1617 kPa
Speed governor type	Mechanical	Electronic
FUEL CONSUMPTION		
110 % (Stand-by power)	24.4 lt./h - 209.2 g/kWh	24.8 lt./h - 208.5 g/kWh
100 % to PRP	22 lt./h - 207.7 g/kWh	22.8 lt./h - 210.7 g/kWh
75 % to PRP	16.2 lt./h - 203.5 g/kWh	17.5 lt./h - 215.4 g/kWh
50 % to PRP	11 lt./h - 206.5 g/kWh	13.4 lt./h - 225.4 g/kWh
COOLING SYSTEM	Water	
Total system cap. - only engine	10 lt - 8.5 lt.	
Fan air flow	132 m ³ /min.	
LUBRIFICATION SYSTEM		
Total oil system capacity	12.8 l	
Oil capacity in sump	8.5 lt. ÷ 5.5 lt.	
Oil consumption at full load	< 0.023 l/h	

EXHAUST SYSTEM		
Maximum exhaust gas flow	8.9 kg/mim.	9.1 kg/mim.
Max. exhaust gas temp.	533 °C	460 °C
Maximum back pressure	5 kPa (0.05 bar)	
External diameter exhaust pipe	/	
ELECTRICAL SYSTEM	12 Vdc	
Starter motor power	3 kW	
Battery charging alternator cap.	90 A	
Cold start	- 10 °C	
With cold start aid	- 25°C	
AIR FILTER	Dry	
Combustion air flow	7.4 m ³ /min	
HEAT REJECTED AT FULL LOAD		
To exhaust system	732 kcal/kWh	608 kcal/kWh
To water and oil	417 kcal/kWh	341 kcal/kWh
Radiated to room	129 kcal/kWh	175 kcal/kWh
To charge cooler	55 kcal/kWh	115 kcal/kWh



ALTERNATOR

SYNCHRONOUS, THREE-PHASE, SELF-EXCITED, SELF-REGULATED, BRUSHLESS	
Continuous power	105 kVA
Stand-by power	116 kVA
Three phase voltage	380 - 415 Vac
Frequency	50 Hz
Cos φ	0.8
Model A.V.R.	MARK V
Voltage regulation acc.	$\pm 0.5\%$
Sustained short circuit current	3 In
Transient dip (100% load)	< 20 %
Recovery time	< 0.3 sec
Efficiency at 100% load	91.8 % (400V - Cos φ 0.8)
Insulation	Class H
Connection - Terminals	Star - N°12
Electromagnetic compatibility (R.F.I. suppr.)	EN 55011
Waveform distorsion - THD	< 2 %
Telephone interference - THF	< 2 %

REACTANCES (105 kVA - 400V)	
Direct axis synchronuos - Xd	275 %
Direct axis transient - X'd	21 %
Subdirect axis transient - X''d	9.9 %
Quadrature axis synchronuos - Xq	150 %
Quadr. axis subtransient - X''q	10.9 %
Negative sequence - X2	10.4 %
Zero sequence - X0	2.2 %
TIME CONSTANTS	
Transient - T'd	0.078 sec
Subtransient - T''d	0.006sec
Open circuit - T'do	0.95 sec
Armature - Ta	0.006 sec
Short-circuit ratio Kcc	0.4
Grado di Protezione IP	IP 23
Cooling air flow	0.31 m ³ /sec.
Coupling Bearing	Direct SAE 3 -11 ½ - N°1

GENERAL SPECIFICATIONS

Fuel tank capacity	230 lt.
Running time (75% to PRP)	13 h
Starter battery	12 Vdc - 100Ah
IP protection degree	IP 44

* Measured acoustic power LwA (pressure LpA)	92 dB(A) (67 dB(A) @ 7m)	
* Guaranteed acoustic power LwA (pressure LpA)	94 dB(A) (69 dB(A) @ 7m)	
Performance class (ISO 8528)	G2	G3

* Acoustic power according to European Directive 2000/14/CE

CONTROL PANEL

- Controller AMF 25
- Controller supply switch
- Siren
- Emergency stop button
- TCM 35 remote control plug
- Four pole circuit breaker
- PAC (ATS) plug - Automatic control panel only
- Battery charger - Automatic control panel only
- Earth terminal (PE)

AMF25 CONTROLLER CHARACTERISTICS

Operating mode	<ul style="list-style-type: none"> • OFF - MAN. - AUTO - TEST
Display	<ul style="list-style-type: none"> • Graphic back-light LCD display 128x64 pixels
LEDs	<ul style="list-style-type: none"> • Gen-set voltage OK • Gen-set failure • GCB ON (only for Automatic transfer unit) • Mains voltage OK (only for Automatic transfer unit) • Mains failure (only for Automatic transfer unit) • MCB ON (only for Automatic transfer unit)
Buttons	<ul style="list-style-type: none"> • START button • STOP button • FAULT RESET button • RESET HORN button • MODE selection button • Pulsante chiusura/apertura GCB button • Pulsante chiusura/apertura MCB button • N° 4 buttons for controller programming
Generator Measures	<ul style="list-style-type: none"> • Voltage : L1-L2 / L2-L3 / L3-L1 - N-L1/N-L2/N-L3 • Current : I1 - I2 - I3 • Powers : kVA - kW - kVAR (totali e per fase) • Energy : kVAh - kWh - kVARh • Cos φ (medium and per phase) • Frequency
Engine Measures	<ul style="list-style-type: none"> • Water temperature • Oil pressure • Fuel level • Rpm meter • Battery voltage • Maintenance • Hours meter • Starts number
Generator Protections	<ul style="list-style-type: none"> • Overload • Overcurrent • Short circuit • Over-Undervoltage • Over-Underfrequency • Voltage asymmetry • Unbalanced current • Phase sequence
Engine Protections	<ul style="list-style-type: none"> • Overspeed • High water temperature warning • Low oil pressure warning • Low fuel level warning • Over-Under battery voltage • Battery charge alternator failure • Start failure • Stop failure • Emergency stop • Low water level shutdown (option)

AMF functions (Automatic control panel only)

- Measure mains voltage : L1-L2 / L2-L3 / L3-L1 - N-L1/N-L2/N-L3
- Measure mains frequency
- Three phase detection
- Over-Under mains voltage
- Over-Under mains frequency
- Voltage asymmetry
- Phase sequence
- Dual mutual stand-by application

Features

- Event log and alarms
- 2 tests run scheduler (Automatic test or scheduled starts)
- Engine idle management (Idle)
- Remote Start and Stop
- Pre-heating
- 2 selectable languages (other languages available)
- Setpoints adjustable via controller buttons or PC
- Direct connection to engines with ECU via Can bus J1939
- Configurable inputs and outputs (only via PC)
- IP65 protection
- Operation temperature: -20°C / +70°C

Communication

- RTU Modbus (optional board with RS232 & RS485 outputs is needed)
- TCP/IP Modbus (optional Ethernet board with RJ45 output is needed)
- SNMP Modbus (optional Ethernet board with RJ45 output is needed)
- Internet (optional Ethernet board optional is needed)
- GSM/GPRS (integrated Modem board optional is needed) for Gen-set remote control via SMS or internet

CONTROL PANEL VERSION WITH OUTPUT SOCKETS

SOCKETS

Each socket is protect by own automatic switch.
Circuit breaker for 125A and 63A sockets.
GFI and circuit breaker 30mA for 32A and 16A socket.

- 1x 400V 125A 3P+T CEE
- 1x 400V 63A 3P+T CEE
- 1x 400V 32A 3P+T CEE
- 1x 400V 16A 3P+T CEE
- 1x 230V 16A 2P+T CEE
- 1x 230V 16A 2P+T SCHUKO

WEIGHT - DIMENSIONS AND ACCESSORIES

GE 110 FSX




DRY WEIGHT MACHINE:
• 1670kg

Generating set pictured may include optional accessories.



DIMENSIONS DRAW

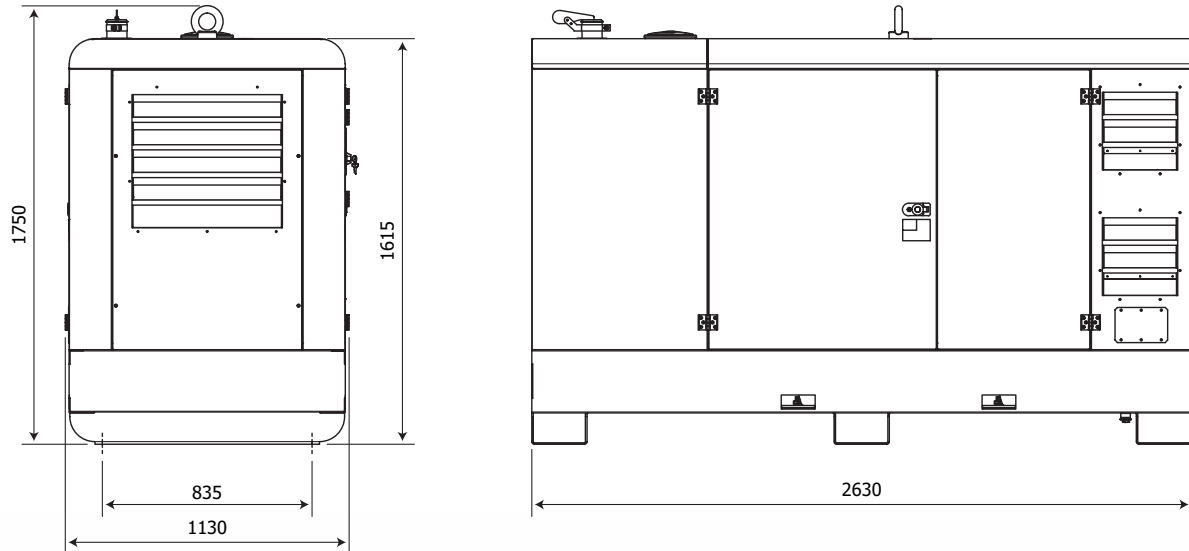

OPTIONS ON REQUEST

- Automatic transfer switch unit (ATS) PAC 111-M (160A)
- Remote control TCM35
- Earthing kit



VERSIONS ON REQUEST

- The electrical panel with Sockets CEE
- Manual digital control panel (without sockets)
- Parallel switch board



FACTORY INSTALLATION OPTIONS

- Engine water heater WH
- Spark arrestor
- Tank 350l
- 3-way valve fuel system with quick connection for external fuel tank supply
- Main battery switch
- Low level water sensor
- PMG - permanent magnet alternator excitation
- Electronic leakage relay
- Isometer
- Volt adjustable from control panel
- Plug-in board with RS232 & RS485 output for RTU Modbus protocol
- Ethernet plug-in board with RJ45 output for TCP/IP Modbus protocol - SNMP Modbus - Internet
- Plug-in board with integrated GSM/GPRS Modem for Gen-set remote control via SMS or Internet

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

- 2006/42 / EC (Machines Directive)
- 2014/35 / EU (Low Voltage Directive)
- 2014/30 / EU (EMC Directive)
- 2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)
- ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2008 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

© MOSA - Viale Europa, 59 - 20090 Cusago (Milano) - Italy - phone +39-0290352.1 - fax + 39-0290390466 E-mail: info@mosa.it Web site: www.mosa.it

