



LIGHTING KIT

TF KIT I9



CHARACTERISTICS

- Zinc plated telescopic mast
- Hydraulic raise/lower
- 340 degrees manual rotation of the tower
- Safety valve for lowering the tower in case of hydraulic system failure
- Two axes manually adjustable floodlights
- Interruttori accensione lampade
- Safety lock
- Base plate ready to be fixed on any kind of platform
- Lifting hooks and forklift pockets
- Three-phase power supply CEE plug 32A/ 400V/ 5P

TRANSPORT



TRUCK 13.60 m	22 towers
CONTAINER 12 m	17 towers
CONTAINER 5 m	9 towers



VERSIONS ON REQUEST


• /




AVAILABLE LAMPS

- TF KIT I9 L-4x280: 4 LED
- TF KIT I9 L-4x350: 4 LED

TF NI9 L-4x240

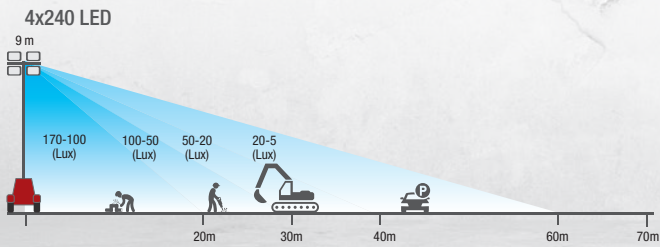

TF NI9 L-4x350

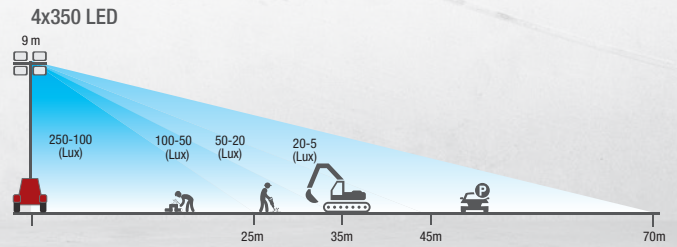


TECHNICAL DATA

DIMENSIONS AND WEIGHT:

	TF KIT I9 L-4X280		TF KIT I9 L-4X350	
	tower closed	tower open	tower closed	tower open
Width (mm)	1070	1070	1070	1070
Width with lamps (mm)	1410	1410	1410	1410
Length (mm)	600	600	600	600
Height (mm)	1870	8600	1870	8600
Weight (Kg)	400		410	

FEATURES

	TF NI9 L-4X240	TF NI9 L-4X350
Illuminated area	4800 mq	4800 mq
Lux average	21	30
Total lumen	153600	210000

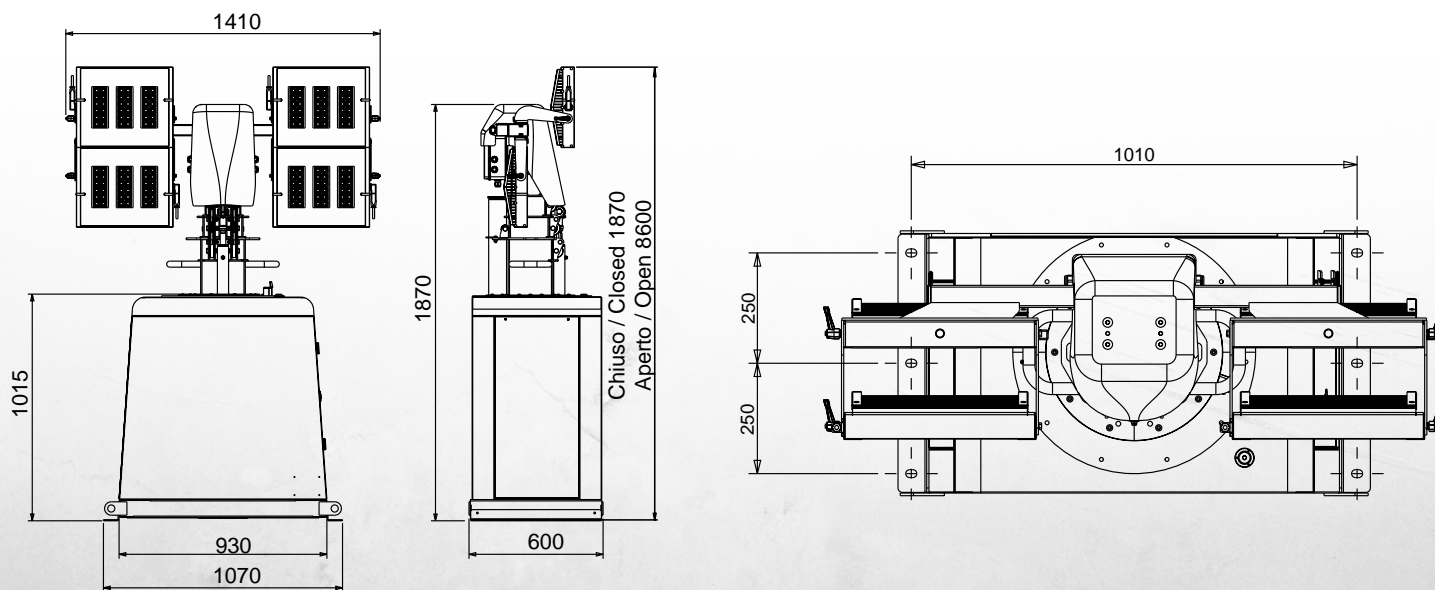

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

2006/42 / EC (Machinery Directive)

2014/35 / UE (Low Voltage Directive)

2014/30 / UE (Electromagnetic Compatibility Directive)

IEC-EN 60974-1 Arc welding equipment - Welding power sources

IEC-EN 60974-10 Arc welding equipment - Electromagnetic compatibility (EMC) requirements



ISO 9001:2015 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

Non-contractual document. Specification subject to change without notice.

© MOSA - Viale Europa, 59 - 20090 Cusago (Milano) - Italy - phone +39-0290352.1 - fax + 39-0290390466 E-mail: info@mosa.it Web site: www.mosa.it

