



LIGHTING KIT

TF NM9



TRANSPORT



TRUCK 13.60 m	5 towers
CONTAINER 12 m	4 towers
CONTAINER 5 m	2 towers

CHARACTERISTICS

- Zinc plated telescopic mast
- Manual winch raise/lower
- 340 degrees manual rotation of the tower
- Wind proof up to 80 km/h **with generator having weight \geq 210 kg**
- Two axes manually adjustable floodlights
- Switches to on/off for lamps
- Site tow trailer structure
- 2 x pneumatic wheels with mudguards
- Safety lock
- 4 x adjustable stabilisers, two extendable
- Lifting hooks and forklift pockets
- Frame prepared for installing a generating set from 8 to 20 kVA



VERSIONS ON REQUEST


- /




AVAILABLE LAMPS

- TF NM9 L-4x240: 4 LED
- TF NM9 L-4x350: 4 LED

TF NI9 L-4x240

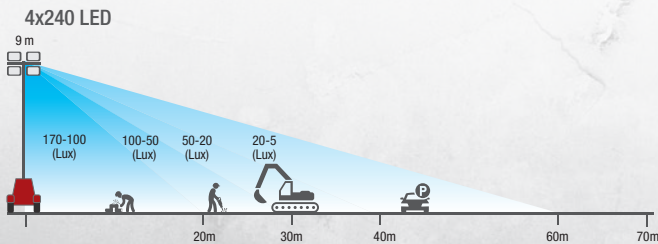

TF NI9 L-4x350

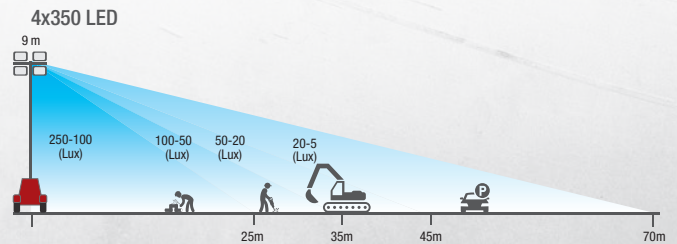


TECHNICAL DATA

DIMENSIONS AND WEIGHT:

	TF NM9 L-4X240		TF NM9 L-4X350	
	tower closed	tower open	tower closed	tower open
Width (mm)	1410	1975	1410	1975
Length (mm)	3920	3920	3920	3920
Height (mm)	2240	9000	2240	9000
Weight (Kg)	790		800	

FEATURES

	TF NI9 L-4X240	TF NI9 L-4X350
Illuminated area	4800 mq	4800 mq
Lux average	21	30
Total lumen	153600	210000

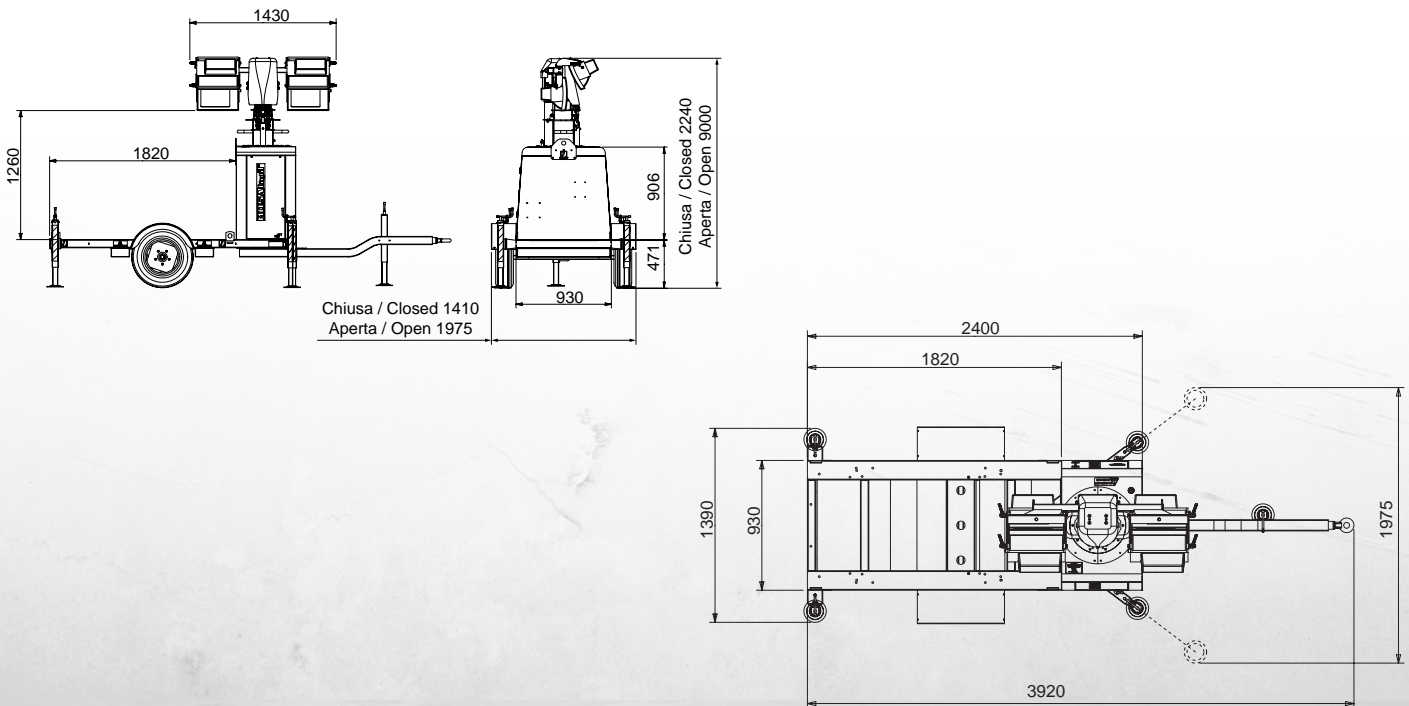

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

- 2006/42 / EC (Machinery Directive)
- 2014/35 / UE (Low Voltage Directive)
- 2014/30 / UE (Electromagnetic Compatibility Directive)
- IEC-EN 60974-1 Arc welding equipment - Welding power sources
- IEC-EN 60974-10 Arc welding equipment - Electromagnetic compatibility (EMC) requirements



ISO 9001:2015 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

Non-contractual document. Specification subject to change without notice.

© MOSA - Viale Europa, 59 - 20090 Cusago (Milano) - Italy - phone +39-0290352.1 - fax + 39-0290390466 E-mail: info@mosa.it Web site: www.mosa.it

